


FRONT-LOADING DISHWASHER

DS D45-30



STANDARD FEATURES

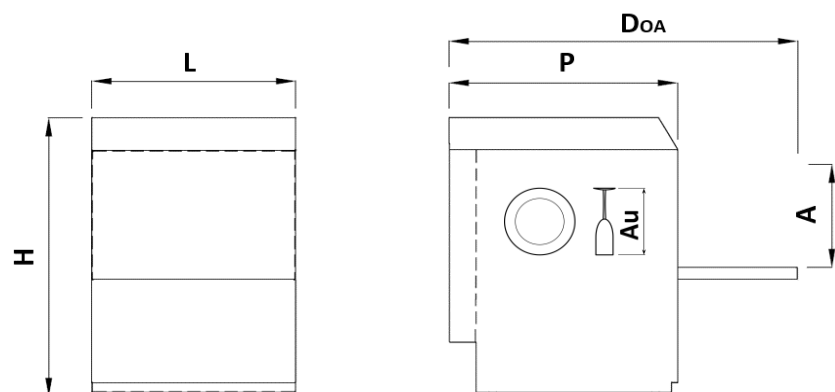

Control panel	ELECTRONIC DIGIT2
Wash arm	2 - Stainless steel
Rinse arm	2 - PP
Detergent injector	Optional
Rinse aid injector	Standard
Peristaltic rinse aid injector	Optional
Break tank	Optional
Water softener	Optional
Drain pump	Optional
Diagnose Wi-Fi	-

TECHNICAL FEATURES

External size	532x550x800	LxPxH	[mm]
Overall size	920	DOA	[mm]
Clearance	320	A	[mm]
Maximum height for crockery	295	Au	[mm]
Rack size	450x450		[mm]
Tank size	21		[lt]
Rinse water consumption	2,6		[lt]
Wash pump	0,40		[kW]
Tank heater element	2,5		[kW]
Booster heater element	4,5		[kW]
Installed load	4,9		[kW]
Cycles	60 / 120 / 180 / 480		[sec]
Output cycles per hour	60 / 30 / 20 / 8		[cycle/h]
Electrical supply	400V/3N/50Hz		
Noise	62		[dBA]
Weight	51		[kg]

Theoretical data with water supply at 55°C

Where water hardness exceeds 8,43°e, a water softener is required. Not suitable for hot water over 30°C

Dimension depending on the type of basket used.



All data, photos or indications on this technical sheet are given for information and have no contractual value. They are subject to change without notice.

FRONT-LOADING DISHWASHER

DS D45-30



STANDARD EQUIPMENT

Hoses (1 for each) Water connection, drain, transparent for rinse product
Baskets 2x14 plates, 1 universal basket, 1 cutlery rack

GENERAL FEATURES

- Double-skinned cabinet and door.
- Tank and door made of stainless steel AISI 304.
- Removable tank cylinder-shaped filter for waste collection
- Press-moulded basket guides in the tank.
- Two stainless-steel wash arms and two rinse arms of composite material, independent and rotary.
- Integral rinse aid dosing unit.
- Digital control panel (DIGIT2).
- Four purpose-designed washing cycles for various types of crockery to be washed.

PERFORMANCES

Supply water temperature	55°C nom.	15	20	25	30	35	40	45	50	55	60	[°C]
Maximum cycles feasible in continuous operation	48	29	31	34	37	40	48	48	48	48	48	[rack/h]
Total spending power from single-skin machine	-	-	-	-	-	-	-	-	-	-	-	[kW]
Total spending power from double-skin machine	4,76	4,81	4,81	4,80	4,79	4,78	4,76	4,76	4,76	4,76	4,76	[kW]
Sensible heat emitted into the room from single-skinned machine	-	-	-	-	-	-	-	-	-	-	-	[kW]
Sensible heat emitted into the room from double-skinned machine	0,47	0,53	0,53	0,52	0,51	0,49	0,47	0,47	0,47	0,47	0,47	[kW]
Latent heat emitted into the room	0,72	0,27	0,31	0,35	0,41	0,48	0,60	0,64	0,68	0,72	0,76	[kW]
Emitted standby power with closed door in single-skin machine	-	-	-	-	-	-	-	-	-	-	-	[kW]
Emitted standby power with closed door in double-skin machine	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	[kW]